

*If You Had A Choice,
Wouldn't You Always Use
Fresh Dampening Solution*

Now You Can With FloClear!



Have you noticed that when you have freshly-mixed fountain solution on Monday morning, everything runs great? The fresh, clean fountain solution can more efficiently carry away the contaminants from the press. The cleaner the fountain solution, the cleaner the dampening system and the cleaner the blankets and plates, all resulting in improved color consistency and press productivity. And, FloClear can assist you in minimizing your environmental impact by reducing overall press-room waste.

FloClear D06c is a compact system for high-volume sheetfed presses and low-volume commercial web press installations with central circulators. Up to twenty-four 40" (102 cm) printing units served by one central circulator can be accommodated. The **D06c** is equipped with a microprocessor control panel (PLC), pump protection for high/low pressure, high temperature shutdown and a warning beacon.

FloClear SYSTEM BENEFITS

Impact On Business

- Improves Color Consistency and Press Productivity
- Reduces Environmental Waste and Hauling Expense
- Improves Blanket Performance
- Reduces Solvent and Chemical Usage
- Reduces Paper Usage

Value

- Increases Press Performance and Profit
- Reduces Dampening System Maintenance Thus Reducing Press Shut-downs
- Extends Blanket Life and Performance

Performance

- Reduces Blanket Piling by Removing Virtually All Fountain Solution Contaminants
- The Fountain Solution Remains as If It Was Freshly Mixed
- Minimizes Press Resetting Between Job Reprints
- Reduces Water & Ink Adjustments



FloClear D06c

We GUARANTEE that the FloClear will have an impact on your business that will improve productivity, reduce unplanned waste, reduce your impact on the environment and add value to your bottom line.

During operation, ink, paper fiber and other contaminants build up in your fountain solution. These contaminants negatively impact print quality. Additionally, as the fountain solution degrades, water adjustments are required and eventually the fountain solution becomes so contaminated that it needs to be replaced.

FloClear constantly recirculates the fountain solution through a unique, multi-stage filtration system that separates all contaminants out of the fountain solution while leaving in the critical ingredients formulated by the chemical manufacturer. All particulate matter including colloidal and sub-colloidal are removed. This unique process can virtually eliminate fountain solution dumping and extend the life of the fountain solution for as long as six months or more.

With the FloClear System, printers can easily and reliably reduce their costs and improve productivity in an area that has been traditionally neglected. Simply eliminating dampening system maintenance and trouble-shooting will typically add 1-2 hours of productivity per week. Additionally, by extending the life of the fountain solution, waste hauling costs will be dramatically reduced. If you are not hauling, the FloClear will greatly reduce the copper, zinc, ink, glycols, phosphates and suspended solids going into the drain, reducing your environmental liabilities.



Used fountain solution before and after treatment by FloClear

Other Models


Model D-06csp is a D-06c equipped with a splitter to serve two central circulators.

Model D-07c - For publication web applications or commercial web presses with central circulators.

Note: D-06c and D-07c products incorporate a PLC controller with low-flow and high-pressure protection, high-temperature shutdown and alarms.

In-line Cabinet - FloClear Productivity HS and 06 Cabinet Models are available to match in-line OEM press installations.

FloClear Treatment Process

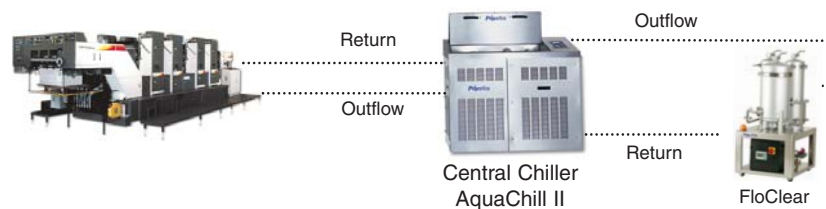

FloClear D06c SPECIFICATIONS

Size (W x L x H)	24" x 27" x 51" (61x69x130cm)
Power	115 VAC 20 AMP 50/60 Hz (20A circuit) or 208-230 VAC 10AMP 50/60 Hz (10A circuit)
Connections	1" (2.54 cm) I.D. Hose
Weight	310 lbs (141 kg) crated

Specifications are subject to change without notice. The system can be retrofitted to virtually all fountain solution recirculators.

FloClear is a registered trademark of FloClear LLC, Plano, TX, USA. - USA Patent # 6,908,558 & 7,087,159 & 7,112,282. Germany Patent # 10 2004 013 411. Other patents pending.

As always, your local PRINTERS' SERVICE office is happy to answer your questions:

Atlanta (800) 241-6049, (678) 602-4140, (678) 602-4139 Fax • **Boston** (781) 749-4590, (781) 740-2866 Fax

Chicago (800) 654-1357, (630) 543-4600, (630) 543-0856 Fax • **Dallas** (800) 338-2241, (817) 477-4770, (817) 473-4515 Fax

Miami (800) 432-5068, (954) 971-0436, (954) 971-9218 Fax • **New York/Newark** (973) 589-7800, (212) 962-6565, (973) 589-3225 Fax

Philadelphia (800) 222-0146, (856) 662-3373, (215) 462-3636, (856) 486-4552 Fax • **Toronto** (888) 460-4406, (905) 953-9393, (905) 953-1331 Fax

Los Angeles (800) 825-4846, (909) 923-1879, (909) 923-4079 Fax • **Europe (U.K.)** +44 (0)1423 810320, +44 (0)1423 810319 Fax

Europe (Belgium) +32 56 40 41 82, +32 56 40 41 83 Fax