





HP Light Fabric

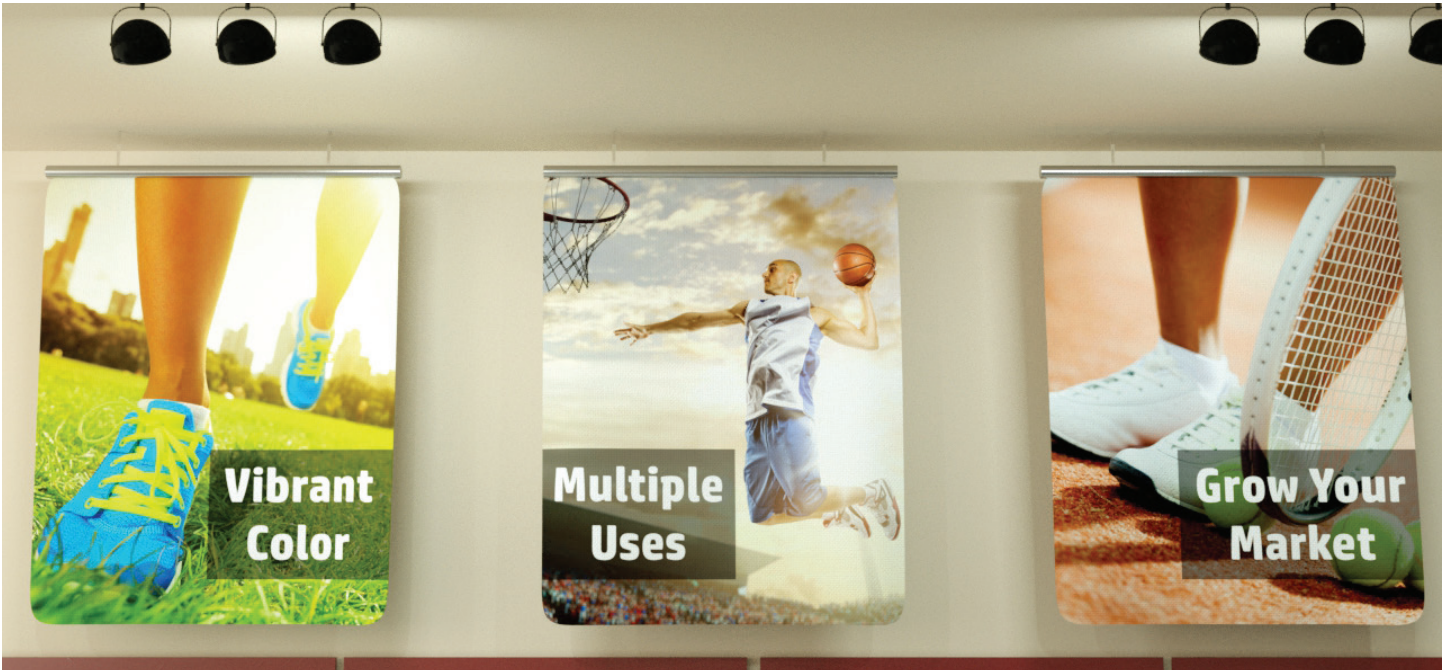

The HP large format printing system—the complete solution

HP large format printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

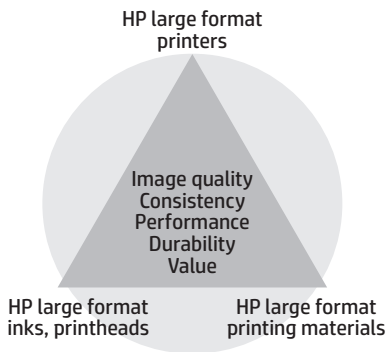

Produce brilliant, high-impact displays with this competitively priced, wrinkle-resistant light textile

Find new profit potential with this reasonably priced light fabric

Create high-impact displays and banners for events and retail POP. This economically priced polyester fabric produces brilliant prints that resist creases and wrinkles. Offer custom work and optimize the cost advantages of this easy-to-use, knitted polyester fabric. And discover new profit potential with this versatile, lightweight textile.

Reassure your clients with environmental and fire certifications

Differentiate your offering with a compelling alternative to PVC for banners and displays. This flame-resistant¹ light fabric is REACH compliant² and OEKO-tex certified⁴, to help you and your customers meet high health and safety standards.

See excellent ink saturation for vibrant image quality

Deliver crisp image quality and bright colors with the wide color gamut produced by HP Latex Inks.

¹ B1, M1, and NFPA701 approved fire certifications.

² This product does not contain substances listed as SVHC (155) per Annex XIV of the EU REACH directive published as of June 16, 2014 in concentrations exceeding 0.1%. To determine the status of SVHC in HP products, see the HP REACH Declaration published at [HP Printing Products and Consumable Supplies](#). Logo source: Copyright European Chemicals Agency.

³ Rub resistance testing by HP Image Permanence Lab according to ASTM F1319.

Target customers	Applications	Benefits
Print service providers	Trade show and event displays	Wide color gamut
	POP/POS and retail displays	Wrinkle and crease resistant
	Banners	An alternative to PVC for banners and displays
	Interior decorations	Flame resistant ¹
	Pop-up/roll-up displays	REACH compliant ²
		Rub- and scratch-resistant prints ³
		OEKO-tex certified ⁴

Technical specifications



HP Light Fabric

For the latest ICC/paper presets, please visit HPLFMedia.com/hp/paperpresets.

Weight	218 g/m ² per ISO 536 Test Method, (6.2 oz)			
Thickness	381 microns/15 mil per ISO 534 Test Method			
Tensile strength	MD > 400 N/25 mm / CD > 1100 N/25 mm per ASTM D 882-02			
Finish	Matte			
Brightness	92% per TAPPI T-452 Test Method			
Whiteness	138 per ISO 11475 Test Method			
Opacity	Greater than 75% per TAPPI T-425 Test Method			
Water resistance	Water resistant with HP Latex Inks ⁵			
Wind orientation	Image side in			
Finishing	Recommend cutting with a hot knife			
Operating temperature	15 to 35° C / 59 to 95° F			
Operating humidity	30 to 80% RH			
Flame resistance	B1, M1, and NFPA701 approved fire certifications ¹			
Dry time	Instant dry			
Shelf life	1 year, unopened in original packaging			
Storage temperature	5 to 40° C / 41 to 104° F			
Storage humidity	5 to 95% RH			
Environmental	REACH compliant ²			
Country of origin	Product of Germany			
Ordering information	Product numbers	Roll sizes	UPC codes	Region
	J7U83A	1067 mm x 45,7 m (42 in x 150 ft)	848412015065	Worldwide
	J7U84A	1372 mm x 45,7 m (54 in x 150 ft)	848412015072	Worldwide
	J7U85A	1524 mm x 45,7 m (60 in x 150 ft)	848412015089	Worldwide
Warranty	HP large format printing materials are free from defects in materials and workmanship. For warranty statement, please see HPLFMedia.com/hp/MediaWarranties . To obtain warranty service, please contact BMG customer support.			

⁴ HP Light Fabric is certified according to Oeko-Tex® Standard 100, which is a globally uniform testing and certification system for textile raw materials, intermediate, and end products at all stages of production. Tested for emissions of volatile organic compounds and chemical residues such as pesticides, allergy-inducing dyestuffs, or tin-organic compounds.

⁵ Water resistance testing by HP Image Permanence Lab on a range of HP media and follows ISO 18935 method. For more information, see HPLFMedia.com/hp/printpermanence.

⁶ It is necessary to use the take-up reel with the HP Latex 210 and platen cover (B2W90A) with the HP Latex 210, 260 and 280 Printers. The platen cover is included with the HP Latex 360 Printer.



For detailed information on the HP large format printing materials portfolio and to order, visit HPLFMedia.com

© 2014 Hewlett-Packard Development Company. © 2014 Brand Management Group. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP and BMG shall not be liable for technical or editorial errors or omissions contained herein.

HP is a registered trademark of Hewlett-Packard Company and is used by Brand Management Group on license from Hewlett-Packard Company. December 2014

Distributed by:

Prisco digital®

ATLANTA

800-241-6049
678-602-4140
FAX: 678-602-4139

BOSTON

781-749-4590
FAX: 781-740-2866

CHICAGO

800-654-1357
630-543-4600
FAX: 630-543-0856

DALLAS

800-338-2241
817-477-4770
FAX: 817-473-4515

LOS ANGELES

800-825-4846
909-923-1879
FAX: 909-923-4079

MIAMI

800-432-5068
954-971-0436
FAX: 954-971-9218

NEW YORK/NEWARK

973-589-7800
212-962-6565
FAX: 973-589-3225

PHILADELPHIA

800-222-0146
856-662-3373
215-462-3636
FAX: 856-486-4552

TORONTO

888-460-4406
905-953-9393
FAX: 905-953-1331