


**Continental**   
The Future in Motion

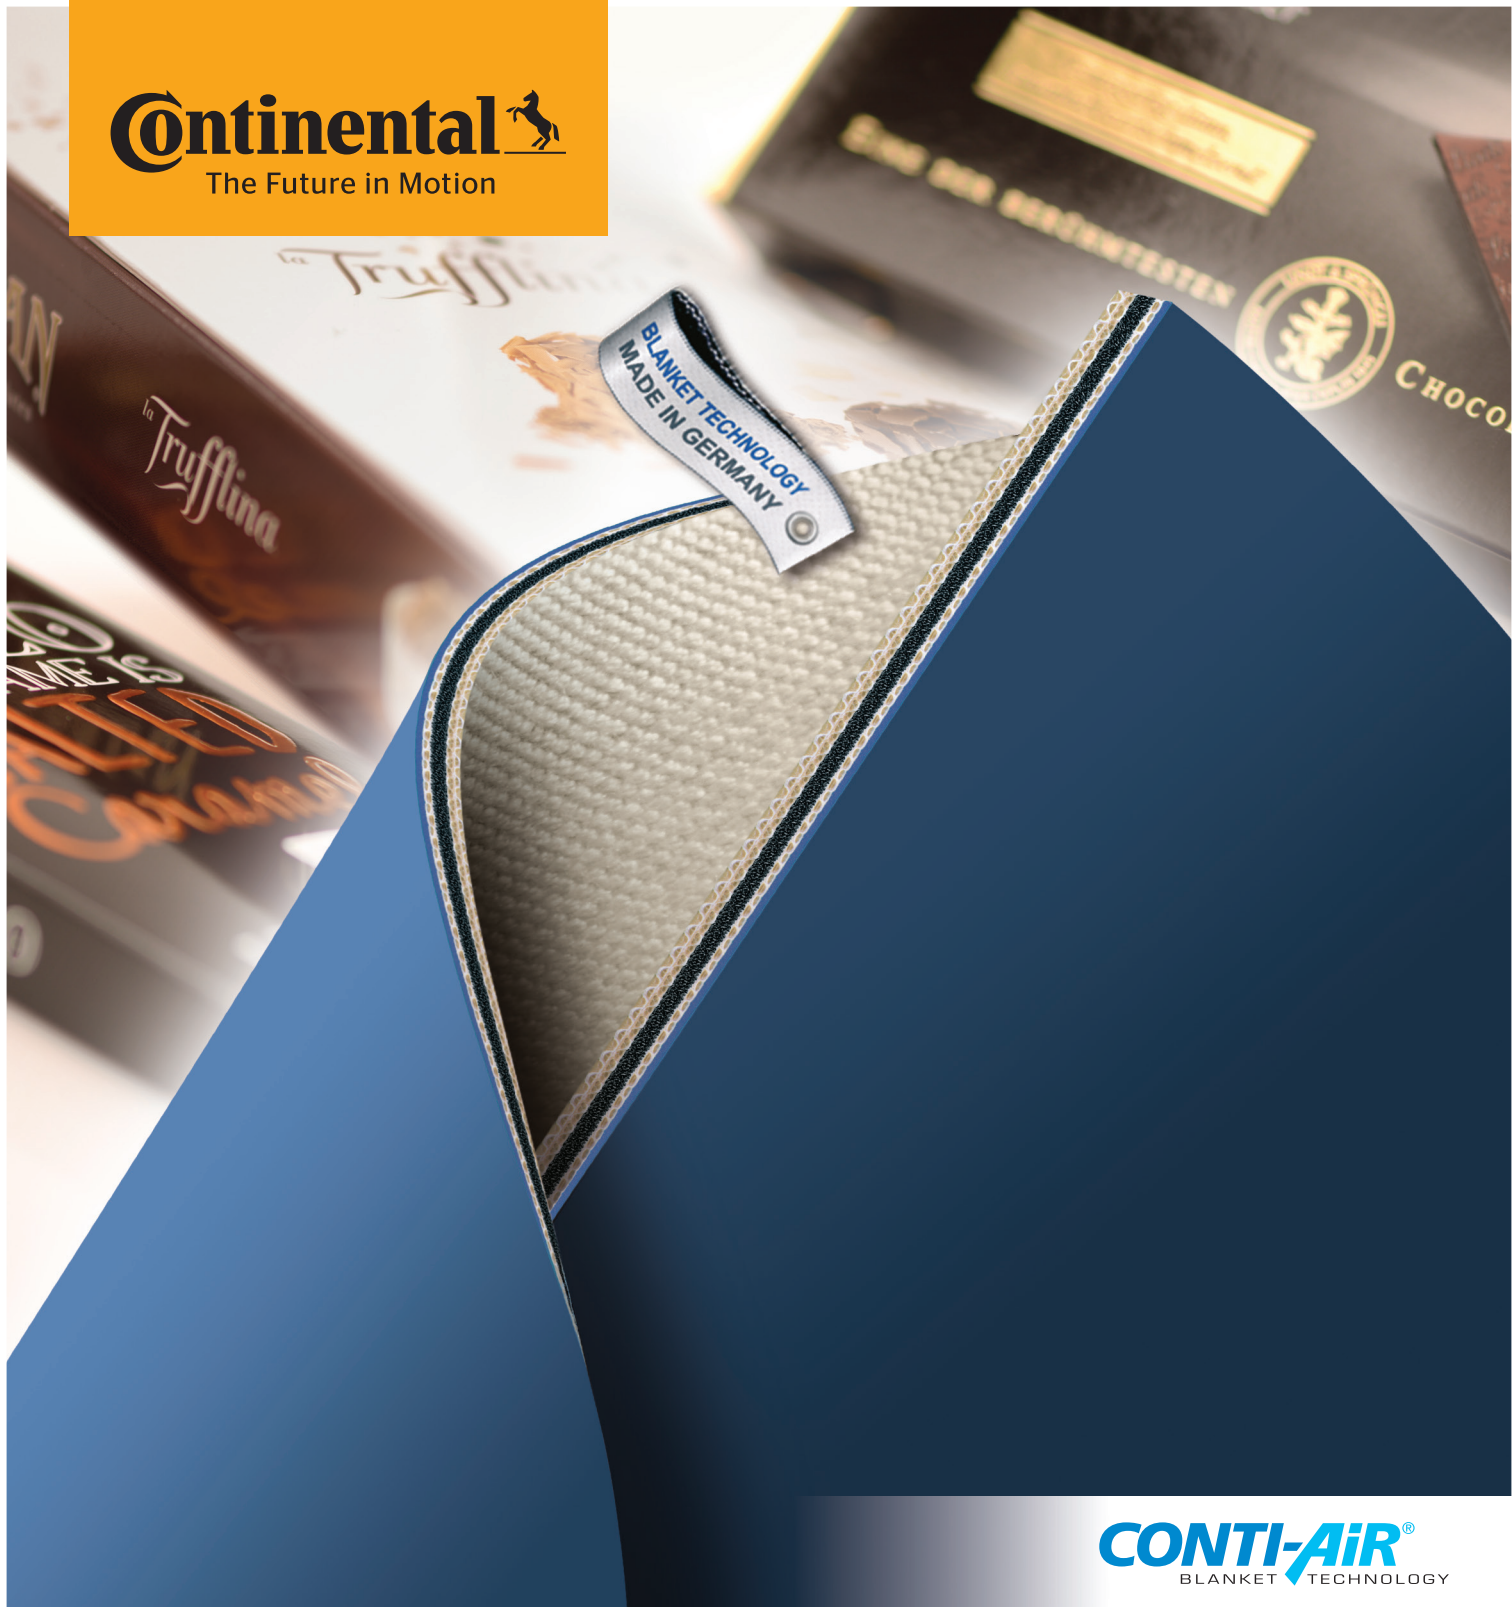

**CONTI-AIR**<sup>®</sup>  
BLANKET TECHNOLOGY

**CONTI-AIR<sup>®</sup> ARGON**

Elastomer Coatings

**ContiTech**

# CONTI-AIR® ARGON



All around printing blanket, ideal for high speed direct driven sheetfed and web presses.

- > Optimized feeding for direct driven presses
- > Excellent sharp dot
- > Suitable for all format sizes

## Technical Data (Nominal Values)

Color:	blue
Surface:	<b>finerground</b>
Surface hardness:	48° Shore A
Total hardness:	80°
Compressibility at 1,350 kPa:	0.200 mm
Elongation at 500 N/5 cm:	0.75 %
Thickness:	1.96 mm
True Rolling (Paper feed characteristics):	neutral

Our printing blankets have a special CONTI-AIR® compressible layer of over pressured microcells.

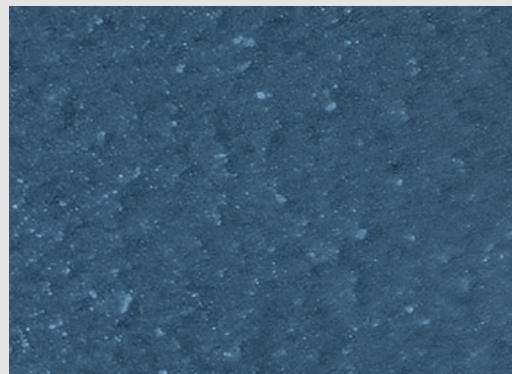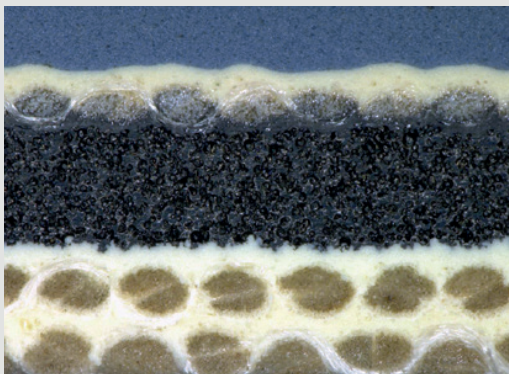

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2016 ContiTech AG, Hanover. All rights reserved. For complete information go to: [www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)

Distributed by:

**Prisco®**



ContiTech Elastomer-Beschichtungen GmbH  
 Market Segment Printing Blankets  
 Breslauer Str. 14 · 37154 Northeim · Germany  
 service@contiair.com · www.contiair.com

**ContiTech**