



**The Profitable Source  
for Finishing Products**

## **Gfp 800DH Series**

**Professional Dual Heat Laminators**

For finishing professionals who need versatility, quality, and economy in one machine, the Gfp 800 Series delivers. Turn out thermal encapsulation with low melt films (1.5-10mil), PSA lamination, and mounting jobs quickly and easily.

**Rugged Design  
Professional Quality  
Proven Performance  
Economically Priced**

### **800DH Series**

#### **ULTIMATE FLEXIBILITY**

*Dual heat for thermal & cold apps*

#### **PROFESSIONAL FEATURES**

*Produce Professional results*

#### **FAST ROLL CHANGES**

*Front/Rear Swing-out shafts*

#### **EASY LOADING**

*3" Quick-Grip Swing-out Shafts*

#### **INDUSTRIAL DESIGN**

*Years of maintenance-free service*




***laminating • mounting • encapsulating***

### ***Our most flexible, cost-effective laminator yet***

Spend less time on set-ups and changeovers with swing-out Quick-Grip supply shafts. Two front rewind shafts allow thermal encapsulation of prints from a roll.



- **Labor saving swing-out 3" Quick-Grip supply shafts**
- **Photoelectric eye for operator safety**
- **Independent top and bottom heaters**
- **Web clutch adjustment for output quality**
- **Optional motorized rear rewind**
- **Swing up feed table and 38" output height**

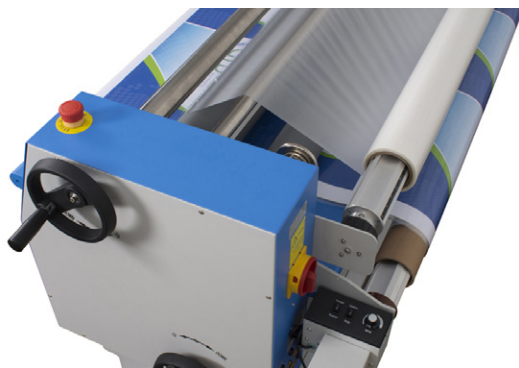

Motorized rear rewind  
for roll-to-roll  
applications

Front and rear swing-  
out film shafts for  
easy loading



## APPLICATIONS

*Signs*  
*Posters*  
*POP Displays*  
*Trade show displays*  
*Dry-erase boards*  
*Graphic mounting*  
*Photo mounting*  
*Floor graphics*  
*Window graphics*  
*Vehicle graphics*

cTUVus  
Safety  
Approval



## Warranty:

**1 year parts & labor.**  
**Installation is included.**

### 847DH-1

### 865DH-1

Laminating Width	47"	65"
Roller Diameter	5"	
Roller Gap	1"	
Main rollers	Silicone	
Supply roll diameter(max)	16" bottom, 8" top	
Film shafts	3" aluminum Quick-Grip	
Rear rewind	Optional	
Max. temperature	266°F	
Heat method	Quartz heater	
Film thickness	1.5 - 10mil	
Laminating speed	0-13 ft/min	
Drive motor	DC geared motor	
Pressure Adjustment	Dual hand wheels	
Roller heating	Top & Bottom	
Power Supply	Single phase 19A 220v 60HZ	Single phase 24A
Power Consumption	Max. 4400W	Max. 5700W
Net Weight w/ stand	601 lbs.	767 lbs.
Dimensions	69" x 34" x 49"	87" x 34" x 49"
Machine shipping	685 lbs. 77" x 38" x 33"	893 lbs. 90" x 38" x 33"
Stand shipping	115 lbs. 61" x 33" x 15"	134 lbs. 79" x 33" x 15"

Your local dealer is:

**Prisco digital®**

[www.prisco.com/priscodigital](http://www.prisco.com/priscodigital)  
[pdsales@prisco.com](mailto:pdsales@prisco.com)

